



Power Wave 4

Three Phase, 8 to 400kW



SHAKER TABLE TESTED AND *HCAI CERTIFIED (FORMERLY OSHPD)

Need a seismic upgrade? Our *HCAI Certified (formerly OSHPD) cabinets will protect your inverter from seismic activity when mother nature calls. With full capabilities of the Power Wave 4 series, this emergency lighting inverter will keep your emergency lighting on when things get shaky.

*California Department of Health Care Access and Information



Scan QR Code

For the latest product news, technical specs, drawings, guides and manuals.

STANDARD FEATURES

- ✓ 90 Minute Backup Design at Full Load
- ✓ Listed to UL924 and UL1778 Standards
- ✓ Self-Ballast Fluorescent, Incandescent, Halogen, Quartz Re-strike, HID, HPS and LED compatible
- ✓ True Online Double Conversion Technology with **Zero Transfer Time**
- ✓ Pure Sinusoidal Waveform
- ✓ High Frequency Pulse Width Modulation (PWM) for Conditioned Power to the Load
- ✓ Internal Maintenance Bypass Switch
- ✓ Input Breaker, Output Breaker and DC Breaker
- ✓ Shaker Table Tested & Seismic Certified Enclosure
- ✓ HCAI Certified (Formerly OSHPD)
- ✓ Field Selectable: UPS Double Conversion or Green Mode (Standby)
- ✓ Independent Phase Control
- ✓ Global Monitoring (GMS 1): Local Event Logger with Memory (PC Connections vis RS232 and RS485) 500 Events
- ✓ Microprocessor Controlled LCD with visual status and Event indicators
- ✓ Self-Testing and Battery Exerciser with LCD Display

OPTIONAL FEATURES

- Global Monitoring (GMS):
 - GMS 2: Remote Monitoring with Local Network Connection (WiFi, Ethernet or Modem)
- Remote Status Panel
- Battery Monitoring (String or Per Battery)
- TVSS Input Transient Voltage Surge Suppressor (Class C)
- Dry Contacts Normally Open
- Dry Contacts Normally Closed
- Normally ON or Normally OFF Auxiliary Output Circuit Breakers (20 Max)
- Custom Rated KAIC Breakers
- 65 KAIC Total System Short Circuit Current Rating
- Thermal Runaway Control (IFC 1206.2)
- External Maintenance Bypass Switch
- Long Life Battery 20 Year Warranty
- Maintenance:
 - Extended Warranty
 - Preventative Maintenance Plans



SPECIFICATIONS

Power Wave 4

Three Phase, †HCAI Certified
10-500kVA (8 to 400kW)

*All units are 90 minutes battery backup time @ full load.
Consult factory for backup times (up to 120 minutes).

† HCAI Certified (formerly OSHPPD)

SAFETY STANDARDS

UL924, UL1778, NFPA101, NFPA70, NEMA, and ANSI
Listed to UL924 and UL1778 Standards

INPUT

AC Voltage: ±15%
Frequency: 50/60Hz ±7

OUTPUT

AC Voltage Regulation: ±1%
Wave Form: Sinusoidal
Harmonic Distortion: Less than 2% THD
Frequency Tolerance: ±0.1 Hz

PROTECTION

Overload: Less than 110% Load: Continuous,
125-150%: 5 min, Higher than 150%: 30 sec

BATTERY

Battery: Sealed, Maintenance-Free VRLA Batteries
Recharge Time: Varies per kVA, conforms to UL924

NOISE ISOLATION

Isolation: True Galvanic Isolated

ENVIRONMENT (Electronics)


Operating Temperature: 0° to 40°C (0° - 104°F)
Storage Temperature: -20° to 70°C (-4° - 158°F)
Humidity: 0% to 90% (non-condensation)
Altitude: Up to 5,000 ft
Audible Noise: Less than 65dBA at 1 meter/39.4 in.

Cabinet Dimensions

(Inches) Width x Height x Depth

Cabinet I 34"W x 63"H x 31.5"D
Cabinet II 55.5"W x 63"H x 31.5"D
Battery Cabinet 51"W x 70"H x 30.5"D

Each model comes with both inverter and battery cabinets. Larger capacity will require additional battery cabinets. Size and weight will vary depending on capacity.

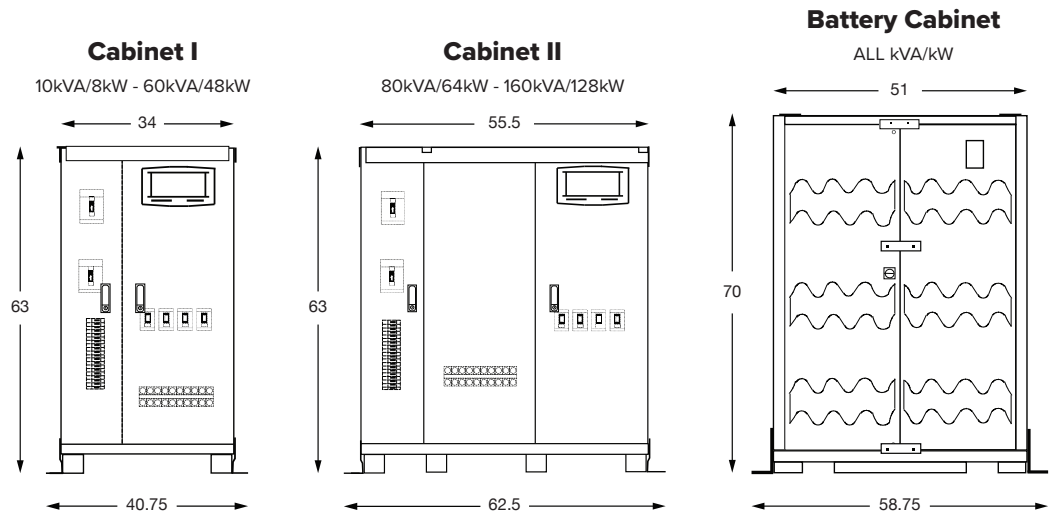

Model Numbers

MODEL	KVA/KW	INPUT	OUTPUT
SV-PW	010 10/8	B 208Y/120	05ATT3 208Y/120
Shaker Table Tested	020 20/16	H 480Y/277	09ATT3 480Y/277
Power Wave 4	030 30/24		
	040 40/32		
	050 50/40		
	060 60/48		
	080 80/64		
	100 100/80		
	120 120/96		
	160 160/128		
	200 200/160		
	240 240/192		
	300 300/240		
	400 400/320		
	500 500/400		

Model Number Example:

SV-PW010B05ATT3
SV: Shaker Table Tested
PW: Power Wave 4
010: 8kW
B: Input: 208Y/120
05ATT3: Output: 208Y/120

kW equates to real power. These units come in one capacity at 0.8 power factor.
Example: 10kVA/8kW

Weights

INVERTER CABINET	STANDARD BATTERY (10YR)								LONG LIFE BATTERY (20YR)				POWER MODE		
	90MIN		120MIN		90MIN		120MIN		90MIN		120MIN		UPS	GREEN	
	KVA/KW	QTY	LBS	QTY	LBS	QTY	LBS	QTY	LBS	QTY	LBS				
10/8	1	840	1	2430	1	2430	1	2975	1	2975			3374	1742	
20/16	1	1083	1	3213	1	3416	1	3990	1	3990			8767	2873	
30/24	1	1260	1	4361	1	4535	1	4135	1	5034			10120	4310	
40/32	1	1414	2	3213	2	3416	1	5034	2	3990			12131	5747	
50/40	1	1525	2	3427	2	3867	2	3990	2	4135			15164	5687	
60/48	1	1724	2	3867	2	4923	2	4135	2	5034			18197	6824	
*80/64	1	2276	2	4615	1	3707		2	5034	3	5034			24263	9099
					2	4729									
*100/80	1	2984	1	3707	2	3416		3	5034	3	5034			30329	11373
					2	4729	2	4923							
*120/96	1	3138	2	3416			4	4923	3	5034	4	5034			
					2	4923									
160/128	1	3868	*	*	*	*	4	5060	5	5060			43193	13507	
200/160	1	5746	*	*	*	*	5	5060	6	5060			53992	16884	
240/192	1	6229	*	*	*	*	6	5060	*	*			64790	20206	
300/240	1	7293	*	*	*	*	*	*	*	*			80988	25326	
400/320	1	9061	*	*	*	*	*	*	*	*			94942	33768	
500/400	1	10166	*	*	*	*	*	*	*	*			118678	42210	

*64kW - Standard Battery (10Yr) 120min: 3 cabinets
*96kW - Standard Battery (10Yr) 90min: 4 cabinets

*80kW - Standard Battery (10Yr) 90min: 3 cabinets, 120min: 4 cabinets
*The approximation is worst case BTU output, measured during recharge following a discharge.

Warranty

Standard warranty is eighteen (18) months from ship date or twelve (12) months from start up, whichever occurs first. Optional second year warranty with factory performed preventative maintenance available.



ORDERING GUIDE

ORDER NUMBER **DOES NOT** REFLECT MODEL NUMBER. PLEASE CONSULT FACTORY.

Power Wave 4 *OSHPD

Example: SV-PW-048-B05-S90-N08A40-FT-FC-GMS2-PM2

SV-PW-

PROJECT NAME : _____

REP / DISTRIBUTOR : _____

ELECTRICAL DESIGNER / ENGINEER : _____

DATE : _____

