


GMS

Global Monitoring System


for **Three Phase** Battery Backup Systems & Central Lighting Inverters

The most advanced Local/Remote Monitor,
Data/Event Logging via SNMP, Wire or Wireless
(status monitoring, email, text messaging, and system report)

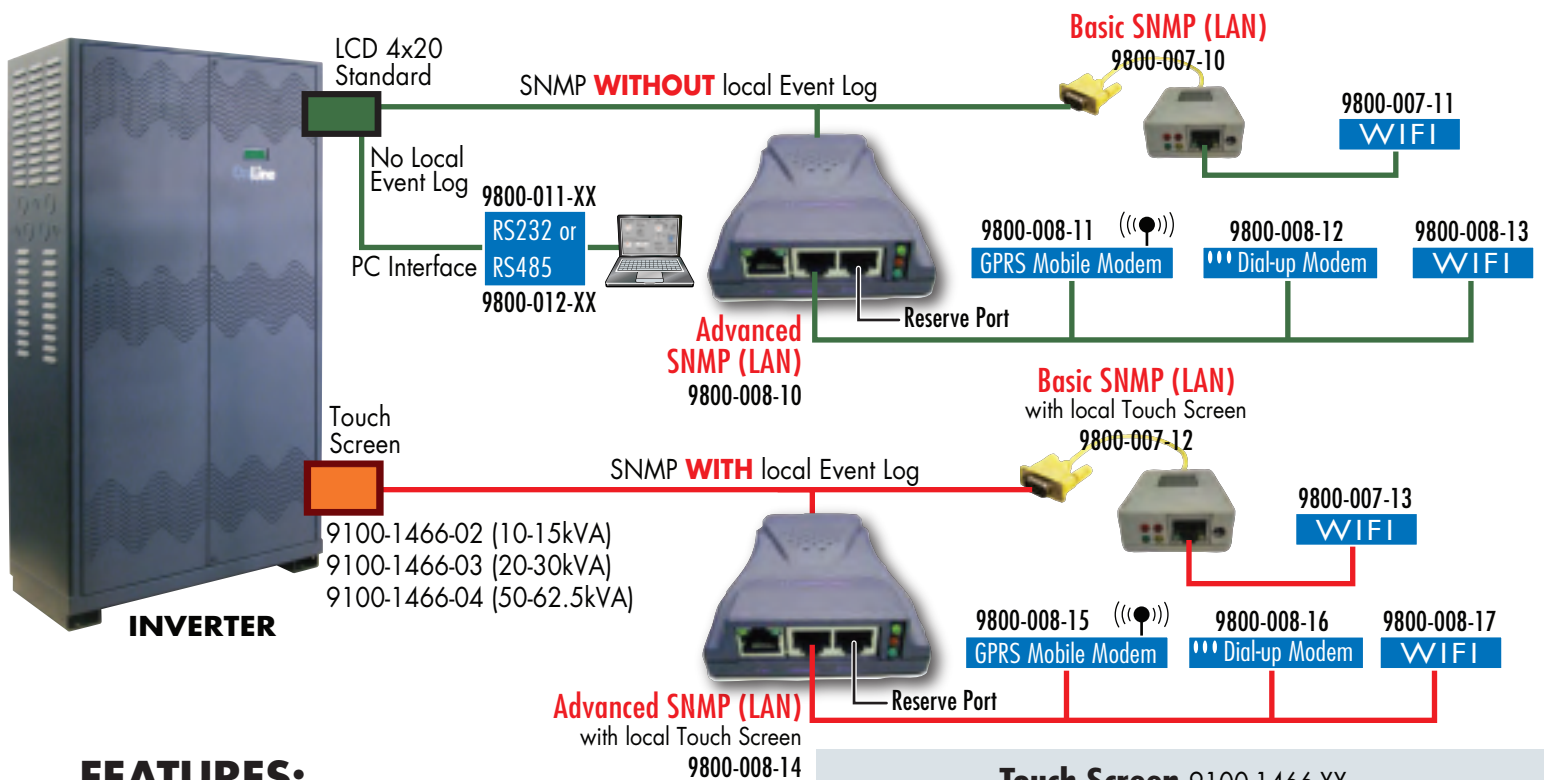

FEATURES:

- Auto-sense 10/100M Fast Ethernet
- Provide SNMP MIB to monitor & log UPS status
- Manage & configure via Telnet, Web Browser or NMS
- Support TCP/IP, UDP, SNMP, Telnet, SNT, PPP, HTTP, SMTP Protocol
- Sending both of SNMP TRAP and E-mail for events notification.
- Auto email daily Battery Backup history report (configurable)
- Basic SNMP (LAN) with WIFI
- Advanced SNMP (LAN) with GPRS, Modem, or WIFI

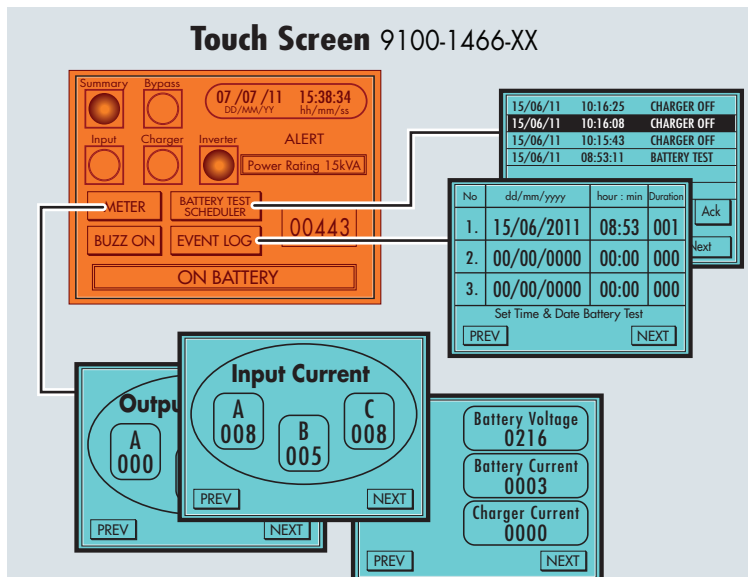

GMS Global Monitoring System



OnLine Powers Global Monitoring System keeps you informed 24 hours a day from a distance (email, text message, report) to prevent Costly Problems of your power system.

PC Interface without Touch screen and local Event Log
RS232(9800-011-XX) or **RS485**(9800-012-XX)

PC interface, status, metering and display 10ft. standard (optional length)

Event Logging:

Yearly Customer Programmable Battery Test Schedule and Text Report

Event Log: 100 events, 12 programmable battery exerciser test and Battery exerciser test log

SNMP with local touch screen

Current Status (UPS Status)	Input Status: AC Status, Input Line Volt, Input Max Line Volt, Input Min. Line Volt, Input Frequency Output Status: Output Volt, Output Status, UPS load Battery Status: Temperature, Battery Status, Battery Capacity, Battery Voltage, Time on Battery			
Meter/Chart (Graphic Type)	Input Volt, Output Volt, Temperature, Frequency, Load, Capacity			
	Basic SNMP (LAN)	Advanced SNMP (LAN)		
Log Info:				
Event Log	500 logs	1000 logs		
SMS Log	N/A	with GPRS unlimited		
Data Log	1000 logs	1000 logs		
Notification:				
Email	8 email address		8 email address	
SMS	N/A		GPRS (8 Phone No)	
Communication:	w/o local Event Log	with local Event Log	w/o local Event Log	with local Event Log
LAN	9800-007-10	9800-007-12	9800-008-10	9800-008-14
WIFI	9800-007-11	9800-007-13	9800-008-13	9800-008-17
GPRS	N/A	N/A	9800-008-11	9800-008-15
Dial-up	N/A	N/A	9800-008-12	9800-008-16

Sample Screens

System Status System Information Network Status **A**

Current Status Input Status Output Status Battery Status **B**

Refresh status every

UPS Status

Input Status
AC Status
Input Line Voltage
Input Max. Line Voltage
Input Min. Line Voltage
Input Frequency

Output Status
Output Voltage
Output Status
UPS loading

Battery Status
Temperature
Battery Status
Battery Capacity
Battery Voltage
Time on Battery

Meter/Chart **C**

Input Volt, Output Volt, Temperature, Frequency, Load, Capacity

Notification: **D**

Email: up to 8 email addresses

Log Info: **E**

Event Log: up to 1000 logs

Data Log: up to 500 logs **F**

Screen Menu

- Information**
- System Status **A**
 - Basic Information
 - Current Status **B**
 - Meter/Chart **C**

- Configuration**
- UPS Configuration
 - Network
 - SNMP
 - Email **D**
 - SMS
 - WEB/Telnet
 - System Time
 - Language

- Log Information**
- Event Log **E**
 - SMS Log
 - Data Log **F**
 - Save Data Log

- Help**
- About